

PICA PORTAL™ 125

DESIGNED BY THE BLACK TANK




Power + Data Via CAT5 for Pica Cubes™

The Pica Portal™ 125 enables up to 4 Pica Cubes to be controlled and powered down a single standard CAT5 cable. The Portal enables electricians and contractors to provide power and data to remotely located Pica Cubes for clean and simple installations in architectural, museum, and entertainment applications.



To connect the Pica Portal™, simply provide it with standard DMX control data and AC power and connect the Pica Portal™ to up to 4 remotely located Pica Cubes™ (up to 240'/73m each from the Portal™). The Pica Portal™ is convection cooled, has built in electrical safety features and integral mounting points for ease of installation.

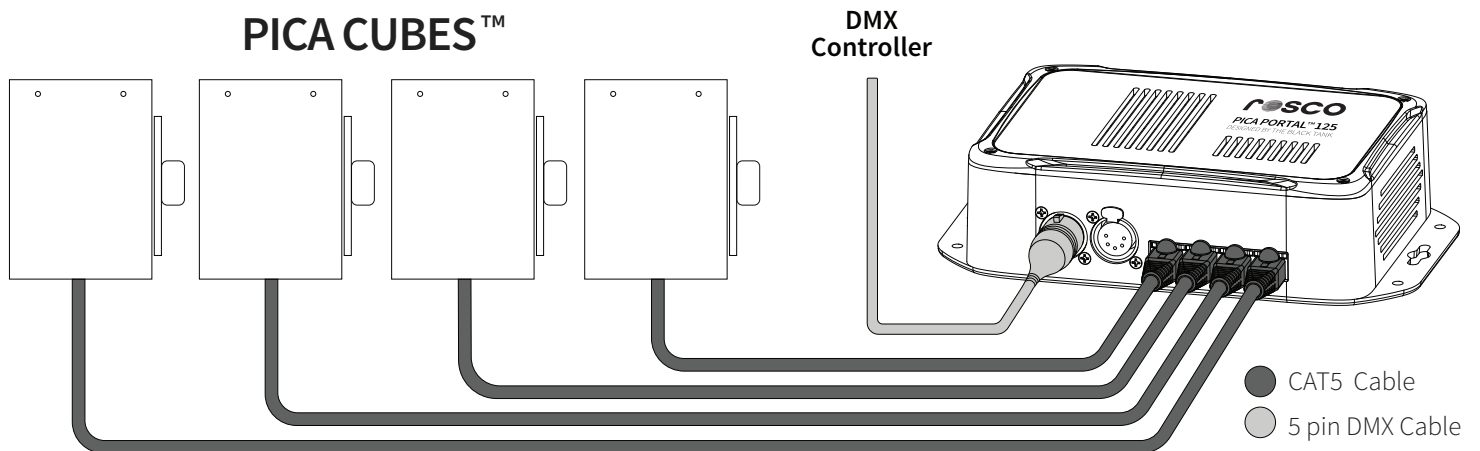

SPECIFICATIONS

Input Voltage:	90 - 240 VAC 50/60Hz
Output Voltage:	24VDC
Power Consumption:	125 Watt at maximum output
Power Input:	IEC Power Cable
Connectors:	DMX 5-pin XLR male & female/ 4x RJ45
Operating Temp.:	-13° to 113° F (-20° to 45° C)
Humidity:	0 - 95% non-condensing
Dimensions:	7.25in x 5in x 2.22in (184mm x 127mm x 56mm)
Weight:	1.5 lbs (.68 kg)
Housing:	Surface Mount ABS Plastic Enclosure
Approvals:	FCC Class A Radiated and Conducted ETL / UL Standards 1573 and 8750 / CE

